


## Ceowniki zwykłe gorącowalcowane

PN-EN 10279

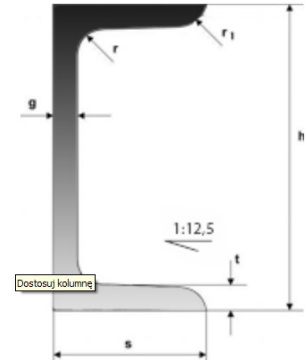

| wyróżnik oznaczenia | h   | s   | g    | t    | r    | r1  | cm <sup>2</sup> | kg/m  |
|---------------------|-----|-----|------|------|------|-----|-----------------|-------|
| C 40                | 40  | 20  | 5,0  | 5,0  | 5,0  | 2,5 | 3,51            | 2,75  |
| C 45                | 45  | 38  | 5,0  | 6,0  | 6,0  | 3,0 | 6,41            | 5,03  |
| C 50                | 50  | 38  | 5,5  | 7,0  | 7,0  | 3,5 | 7,12            | 5,59  |
| C 65                | 65  | 42  | 6,0  | 7,5  | 7,5  | 4,0 | 9,03            | 7,09  |
| C 80                | 80  | 45  | 6,0  | 8,0  | 8,0  | 4,0 | 11,00           | 8,64  |
| C 100               | 100 | 50  | 6,0  | 8,5  | 8,5  | 4,5 | 13,50           | 10,60 |
| C 120               | 120 | 55  | 7,0  | 9,0  | 9,0  | 4,5 | 17,00           | 13,40 |
| C 140               | 140 | 60  | 7,0  | 10,0 | 10,0 | 5,0 | 20,40           | 16,00 |
| C 160               | 160 | 65  | 7,5  | 10,5 | 10,5 | 5,5 | 24,00           | 18,80 |
| C 180               | 180 | 70  | 8,0  | 11,0 | 11,0 | 5,5 | 28,00           | 22,00 |
| C 200               | 200 | 75  | 8,8  | 11,5 | 11,5 | 6,0 | 32,20           | 25,30 |
| C 220               | 220 | 80  | 9,0  | 12,5 | 12,5 | 6,5 | 37,40           | 29,40 |
| C 240               | 240 | 85  | 9,5  | 13,0 | 13,0 | 6,5 | 42,30           | 33,20 |
| C 260               | 260 | 90  | 10,0 | 14,0 | 14,0 | 7,0 | 48,30           | 37,90 |
| C 280               | 280 | 95  | 10,0 | 15,0 | 15,0 | 7,5 | 53,30           | 41,80 |
| C 300               | 300 | 100 | 10,0 | 16,0 | 16,0 | 8,0 | 58,80           | 46,20 |